

FEATURES

- Suits all Satori TW29 models
- Die cast aluminium waveguide
- Screwless driver mounting
- Adapter ring included
- Smooth controlled directivity


Mounting instructions:

Undo the screws on the faceplate (2.5mm Allen key).
 Slowly and carefully remove the faceplate (excess glue at the edge of the diaphragm may stick to the back of the faceplate).
 Use the same screws to mount the adapter ring on the tweeter.
 Insert the waveguide to the adapter ring.
 Fasten the four set screws (1.3mm Allen key).


Dimensions & Weight

Waveguide material	Aluminium die cast
Waveguide finish	Black Matte
Overall diameter	187 mm (7.36 in)
Overall height	39 mm (1.53 in)
Net weight	0.49 kg (1.08 lb)
Gross weight	0.6 kg (1.32 lb)
Shipping box (W x D x H)	199x190x50 mm (7.83 x 7.48 x 1.97 in)


SATORI TW29BN+WG

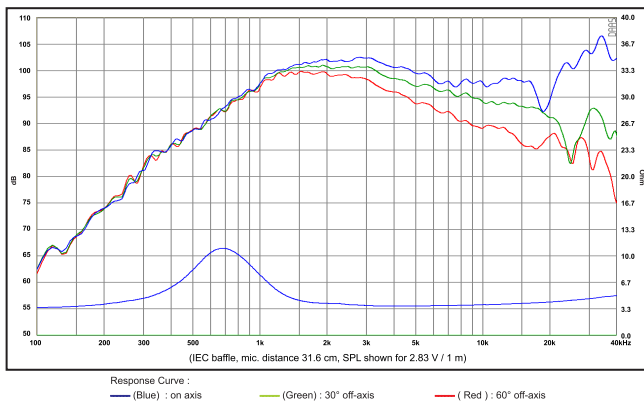


SATORI TW29BN-8+WG

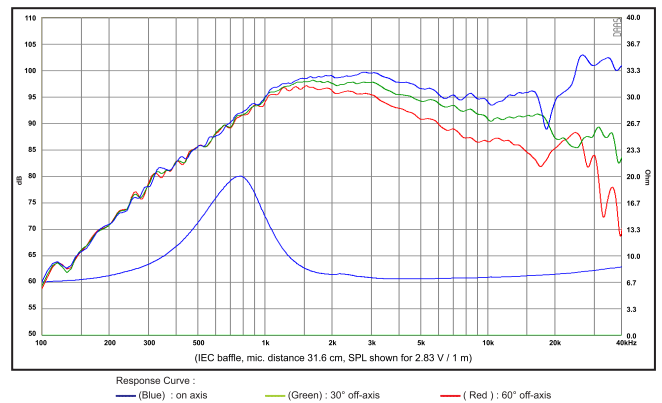


SATORI TW29TXN-B+WG

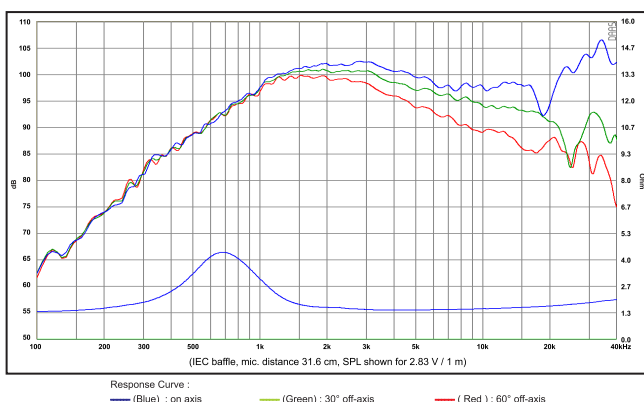


SATORI TW29TXN-B-8+WG

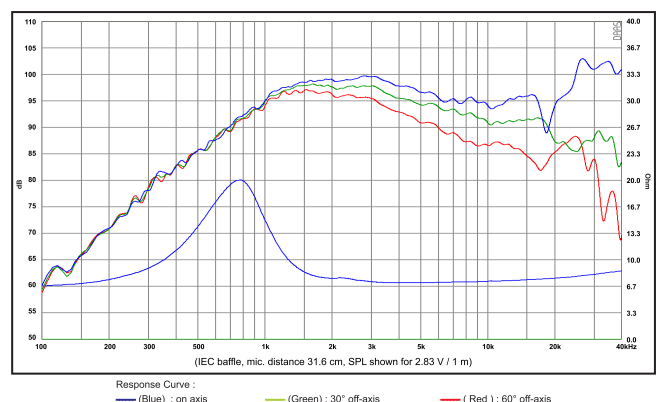


SATORI TW29B+WG

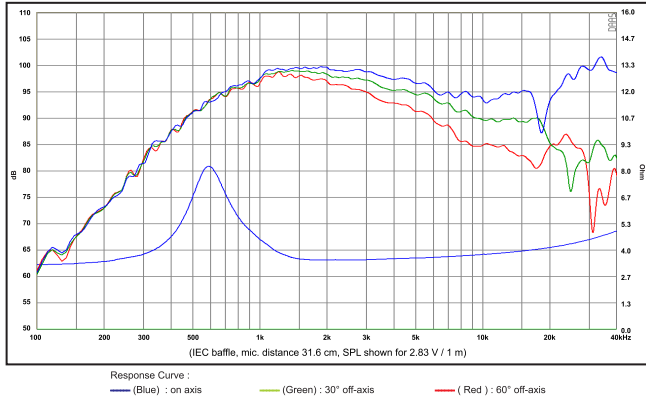


SATORI TW29D+WG

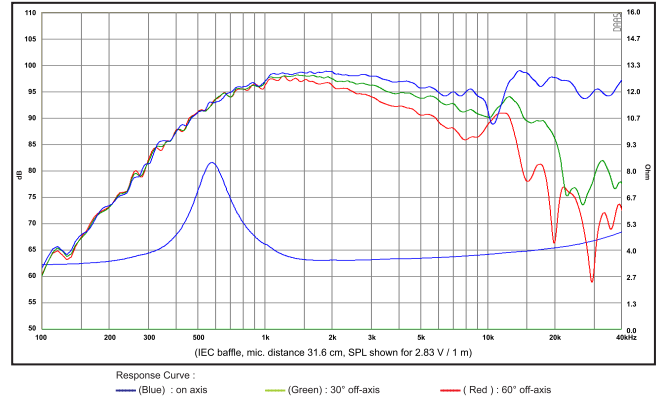


SATORI TW29DN+WG

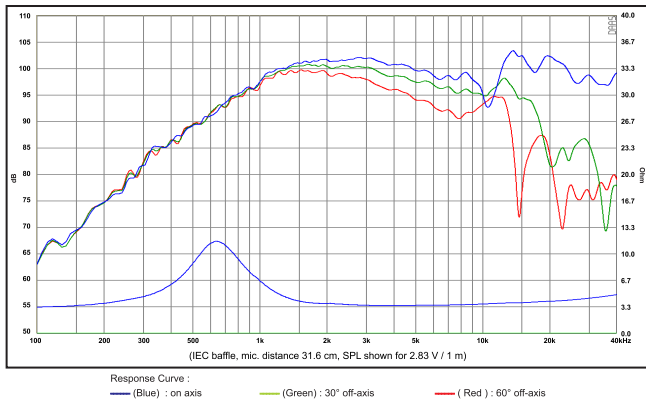


SATORI TW29DN-8+WG

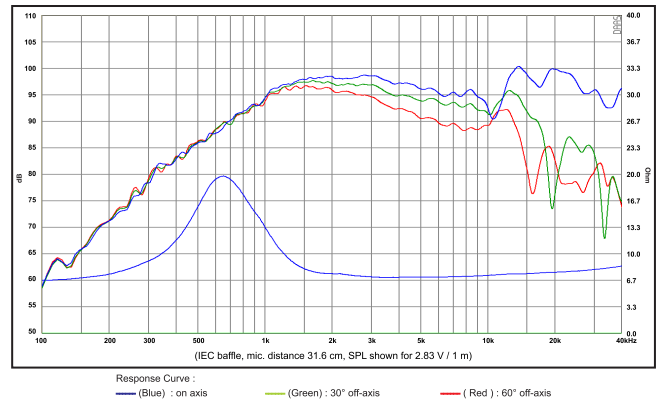

SATORI TW29RN+WG

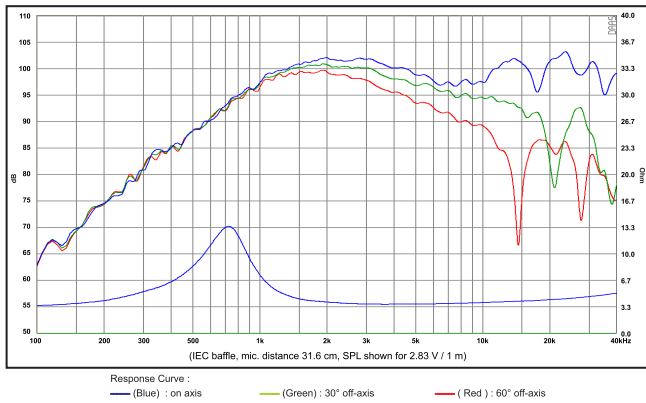

SATORI TW29RN-8+WG

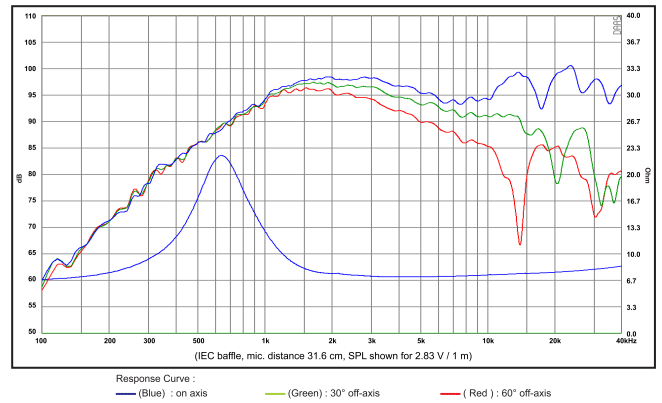

SATORI TW29R+WG

