


### Specs :

### FEATURES

- Advanced TeXtreme(R) cone for improved piston operation
- Large optimized motor system with under-cut pole piece and dual shorting rings
- Vented aerodynamic cast aluminium chassis for optimum strength and low compression
- Soft low damping rubber surround for optimum transient response
- Linear symmetric suspension design for improved dynamic performance
- Non-conducting fibre glass voice coil former for minimum damping
- Long life silver lead wires attached 180° apart for improved stability
- Vented pole piece for reduced compression
- Low piston to chassis diameter ratio
- Gasket and bolt hole protrusions for reduced coupling to speaker cabinet

Nominal Impedance	4 Ω	Free air resonance, Fs	26.3 Hz
DC resistance, Re	3.3 Ω	Sensitivity (2.83V/1m)	91 dB
Voice coil inductance, Le	0.29 mH	Mechanical Q-factor, Qms	5.66
Effective piston area, Sd	255 cm <sup>2</sup>	Electrical Q-factor, Qes	0.37
Voice coil diameter	49.5 mm	Total Q-factor, Qts	0.35
Voice coil height	23.5 mm	Moving mass incl. air, Mms	42.8 g
Air gap height	6 mm	Force factor, Bl	7.9 Tm
Linear coil travel (p-p)	17.5 mm	Equivalent volume, Vas	79 liters
Magnetic flux density	1.07 T	Compliance, Cms	0.86 mm/N
Magnet weight	1.36 kg	Mechanical loss, Rms	1.25 kg/s
Net weight	3.9 kg	Rated power handling*	90 W

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

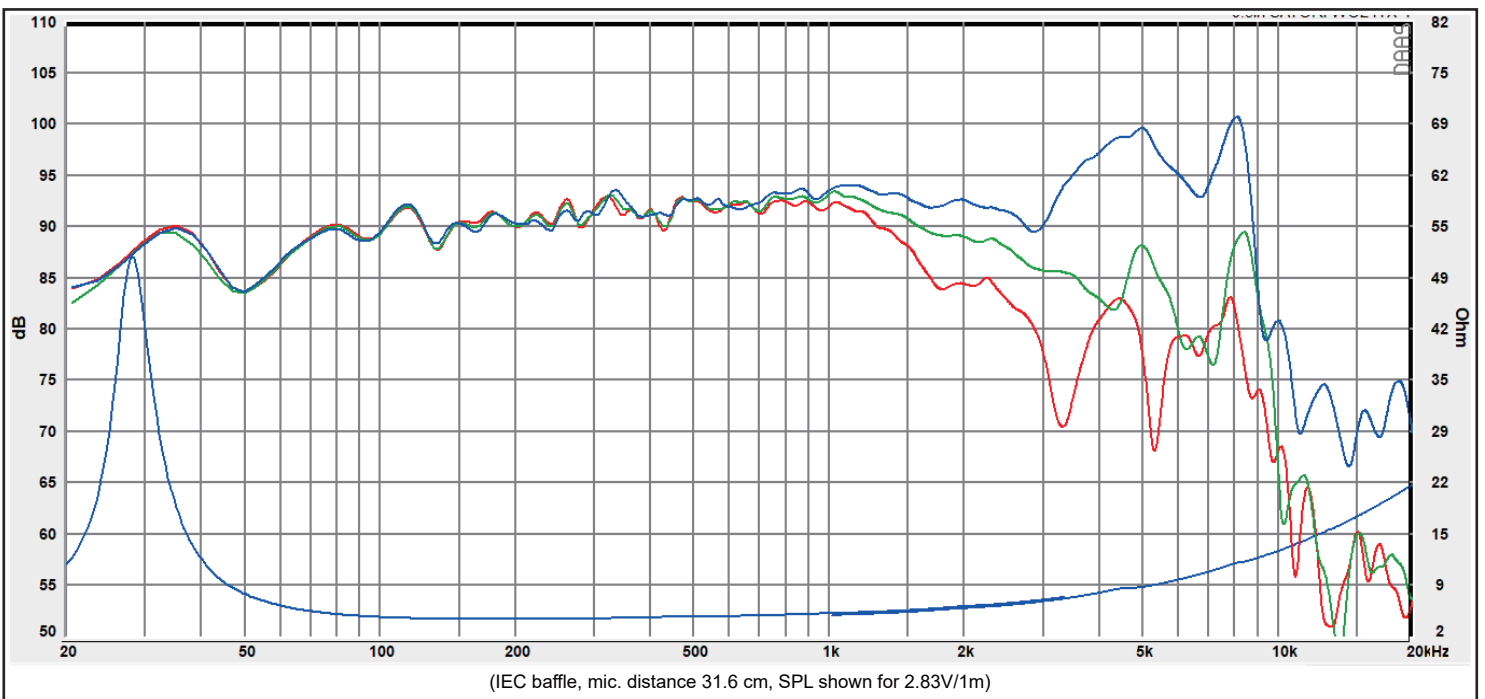

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis