

### FEATURES

- Suits all Satori TW29 models
- Die cast aluminium waveguide
- Screwless driver mounting
- Adapter ring included
- Smooth controlled directivity


### Dimensions & Weight

Waveguide material	Aluminium die cast
Waveguide finish	Black Matt
Overall diameter	290 mm (11.4 in)
Overall height	118 mm (4.64 in)
Net weight	0.98 (2.16 lb)
Gross weight	1.37 kg (3.02 lb)
Shipping box (W x D x H)	301x601x144 mm (11.8 x 11.8 x 5.67 in)


### Mounting instructions:

Undo the screws on the faceplate (2.5mm Allen key).  
 Slowly and carefully remove the faceplate (excess glue at the edge of the diaphragm may stick to the back of the faceplate).  
 Use the same screws to mount the adapter ring on the tweeter.  
 Insert the waveguide to the adapter ring.  
 Fasten the four set screws (1.3mm Allen key).


### SATORI TW29BN+WG

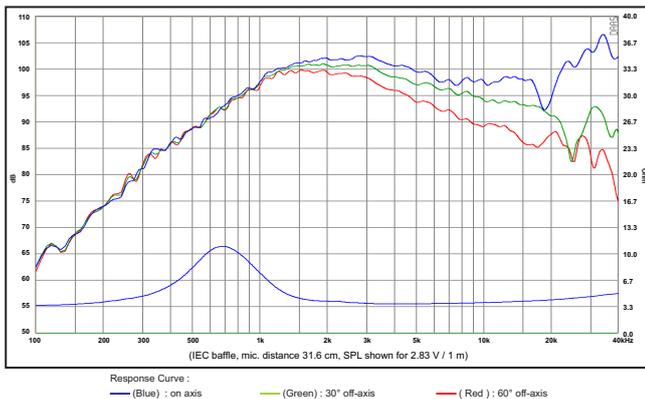


### SATORI TW29BN-8+WG

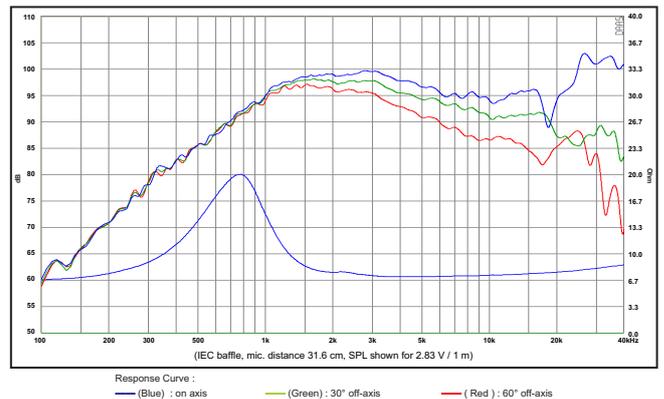


### SATORI TW29TXN-B+WG

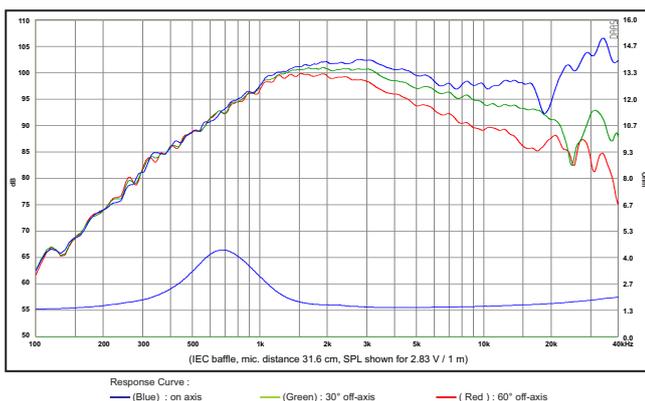

### SATORI TW29TXN-B-8+WG

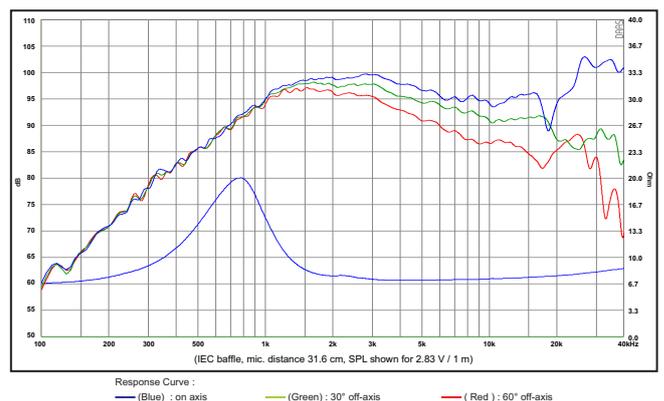


## SATORI TW29B+WG

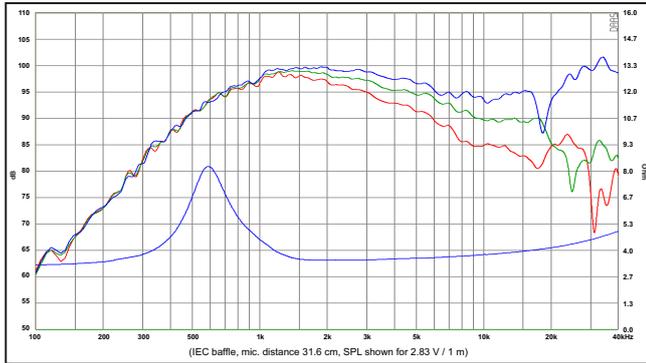


Response Curve :  
 (Blue) : on axis      (Green) : 30° off-axis      (Red) : 60° off-axis

## SATORI TW29D+WG

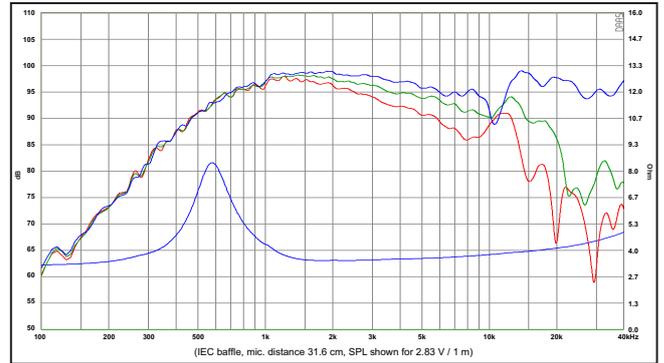


Response Curve :  
 (Blue) : on axis      (Green) : 30° off-axis      (Red) : 60° off-axis

## SATORI TW29DN+WG

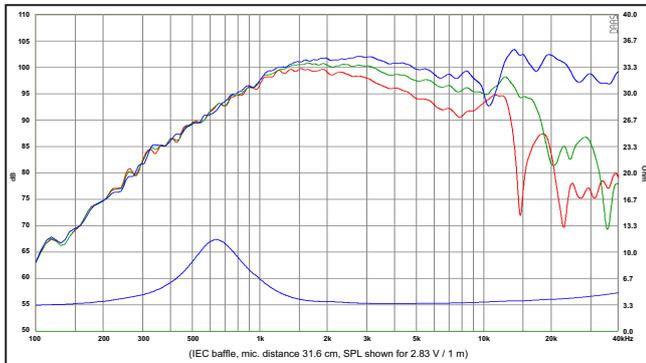


Response Curve :  
 (Blue) : on axis      (Green) : 30° off-axis      (Red) : 60° off-axis

## SATORI TW29DN-8+WG

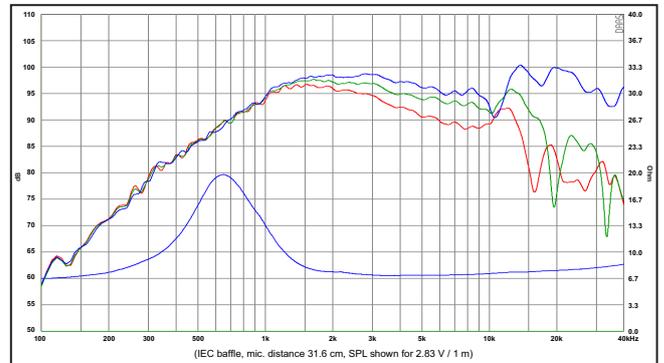


Response Curve :  
 (Blue) : on axis      (Green) : 30° off-axis      (Red) : 60° off-axis

## SATORI TW29RN+WG

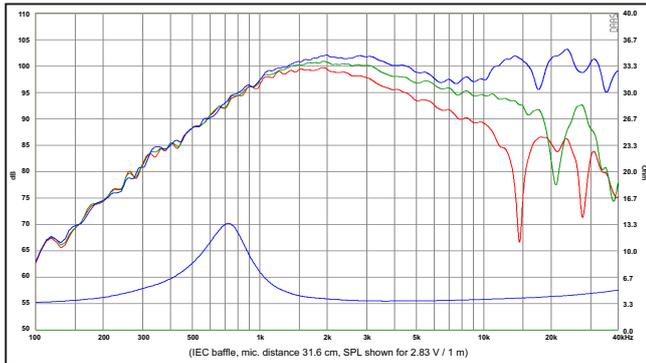


Response Curve :  
 (Blue) : on axis      (Green) : 30° off-axis      (Red) : 60° off-axis

## SATORI TW29RN-8+WG

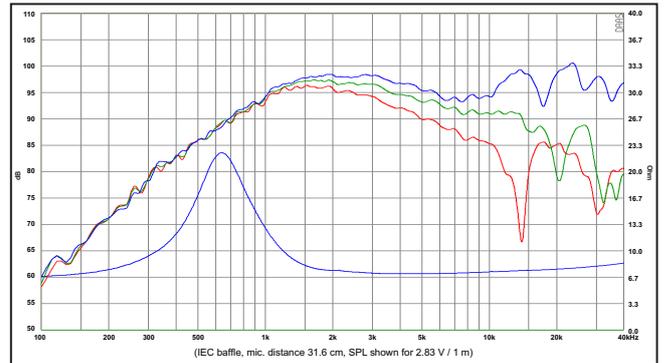

Response Curve :  
 (Blue) : on axis      (Green) : 30° off-axis      (Red) : 60° off-axis

## SATORI TW29R+WG

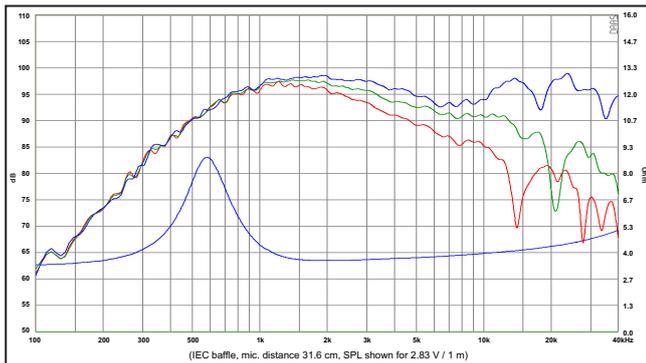

Response Curve :  
 (Blue) : on axis      (Green) : 30° off-axis      (Red) : 60° off-axis