


Crossover for SB15BAC30-8-COAX

This crossover is optimized for in-wall/in-ceiling applications and does not account for edge diffraction (baffle step). Furthermore, this design does not include a high-pass filter for the woofer. It should be crossed over at 60-80 Hz, or higher.

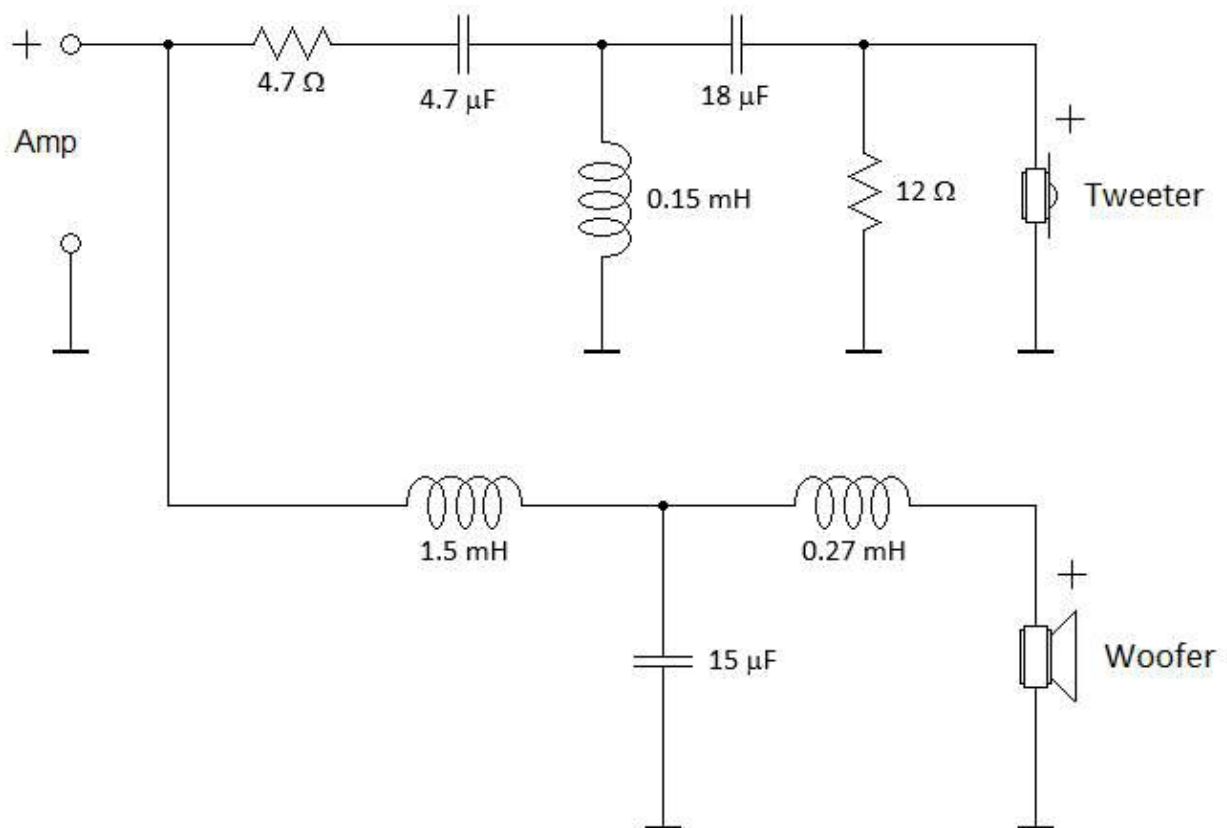

Crossover for SB17BAC35-8-COAX

This crossover is optimized for in-wall/in-ceiling applications and does not account for edge diffraction (baffle step). Furthermore, this design does not include a high-pass filter for the woofer. It should be crossed over at 60-80 Hz, or higher.

